

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

104633 11
7



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 11/00	A2	(11) International Publication Number: WO 00/07406 (43) International Publication Date: 10 February 2000 (10.02.00)
--	-----------	---

(21) International Application Number: PCT/US99/15277

(22) International Filing Date: 7 July 1999 (07.07.99)

(30) Priority Data:
09/126,835 30 July 1998 (30.07.98) US

(71)(72) Applicant and Inventor: SUBBIAH, Baranitharan
[IN/US]; Apartment J, 1665 Belleville Way, Sunnyvale,
CA 94087 (US).

(74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., 3100
Norwest Center, 90 South Seventh Street, Minneapolis, MN
55402-4131 (US).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: KNOWLEDGE-BASED CONNECTION ADMISSION METHOD AND APPARATUS FOR PROVIDING EFFICIENT MULTIPLEXING OF DATA AND SPEECH OVER AAL2

(57) Abstract

A knowledge-based connection admission method is disclosed for efficient multiplexing of data and speech over AAL2. The method uses a knowledge-based technique to decide when and what type of data traffic will be multiplexed with speech traffic in ATM Adaptation Layer 2 (AAL2) environment. The knowledge-based connection technique supports low bit rate and delay sensitive applications such as mobile telephony in an ATM environment by maximizing the use of available bandwidth. The method includes monitoring ATM cells for an AAL2 connection, determining whether the ATM cells contain unused bytes and multiplexing data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements. The method determines whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexes the data traffic with the speech traffic when the bandwidth required by the data traffic does not exceed the bandwidth provided by the unused bytes and prevents the multiplexing of the data traffic with the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes. The unused bytes represent silence periods during speech traffic. System observations are gathered and processed with prior knowledge about the system. Based upon the processing, whether the data traffic is suitable for multiplexing with speech traffic is determined and the data is multiplexed with the speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic in the unused bytes of the speech ATM cells.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

KNOWLEDGE-BASED CONNECTION ADMISSION METHOD AND APPARATUS FOR PROVIDING EFFICIENT MULTIPLEXING OF DATA AND SPEECH OVER AAL2

BACKGROUND OF THE INVENTION

5 1. Field of the Invention.

This invention relates in general to a network communications, and more particularly to a knowledge-based connection admission method and apparatus for providing efficient multiplexing of data and speech over AAL2.

10 2. Description of Related Art.

ATM has been selected as a world standard for broadband ISDN in network communication systems. ATM systems have been implemented on a global basis and developed in a rapid growth. ATM technology is destined to play a major role in both public and private broadband networks. AAL2 is one of the four types of AAL (ATM Adaptive Layer) protocols which have been recommended by CCITT
15 (now ITU-T), namely AAL1, AAL2, AAL3/4 and AAL5. In general, the layer services provided by AAL1 are constant bit rate (CBR) services which require information to be transferred between source and destination at a constant bit rate. AAL2 offers a transfer of information with a variable bit rate. In addition, timing information is transferred between source and destination. Since the source is
20 generating a variable bit rate, it is possible that cells are not completely filled and that filling level varies from cell to cell. AAL3/4 is used for transfer of data which is sensitive to loss, but not sensitive to delay. The AAL3/4 protocol may be used for connection oriented as well as for connectionless data communication. AAL3/4 itself does not perform all functions required by a connectionless service, since
25 functions like routing and network addressing are performed on the network layer. AAL5 is designed to offer a service with less overhead and better error detection below the common part of the convergence sublayer (CPCS).

The AAL2 signaling protocol describes methods by which a switched AAL2 connection can be established between two AAL2 end users across a network that
30 consists of both ATM and AAL2 switches. The important function of AAL2 signaling protocol is to establish an AAL2 connection between two AAL2 end points on a concatenation of ATM Virtual Channel Connections (VCCs) that are either on demand (SVC) or semi-permanent (PVC). Some the basic requirements of AAL2 signaling protocol include the ability to establish an AAL2 connection between
35 AAL2 end systems that support AESA formats, the ability to support hop-by-hop routing mechanism between AAL2 end systems, the ability to indicate any failures to

corresponding management entity, and the ability to setup AAL2 connections with different Quality-of-Service (QoS) requirements. In AAL2, packets (minicells) from many users are assembled into a single ATM cell and transmitted on the same ATM connection. In addition, packets are allowed to straddle across ATM cell
5 boundary to maximize the bandwidth utilization.

The success of ATM in wireline network has given impetus to the wireless network operators to adopt ATM for efficient use of network resources and able to support growing demands for different services. With AAL2, low bit rate and delay sensitive applications, such as mobile telephony, share a common ATM VCC thus
10 increasing statistical multiplexing efficiency. Bandwidth efficiency, due to AAL2 for delay sensitive speech traffic, has been confirmed by simulation studies and commercial products available today.

The AAL2 standard consists of Common Part Sublayer (CPS) and Segmentation and Reassembly Service Specific Convergence Sublayer (SAR-SSCS). The CPS standard describes the procedures involved in multiplexing
15 packets from different users on a single ATM VCC and the SAR-SSCS standard specifies ways to carry packets that are larger than 64 bytes in AAL2.

The procedure involved in transmitting data over AAL2 is similar to AAL5. A data packet received from a user is added 8 byte Service Specific Transmission
20 Error Detection Sublayer (SSTED) trailer similar to AAL5 trailer. Even though, SAR-SSCS specification describes three different ways to transmit a data packet, the SSTED trailer is added to obtain similar services offered by AAL5. The main difference between AAL5 and AAL2 is the padding, which is not needed in AAL2. If the size of a data packet is larger than 64 bytes then it is segmented into multiple
25 of 64 bytes. Each segment is converted into CPS-Packet with a 3 byte header and passed to the CPS layer for AAL2 multiplexing. The CPS layer assemble these minicells in ATM cells and transmit them to remote AAL2 peer entity. The maximum size of a data packet is limited to 65535 octets in SAR-SSCS.

Recently, there has been considerable interest in multiplexing best effort data
30 traffic along with speech to achieve the maximum bandwidth efficiency in the output ATM link. However, with current multiplexing method and apparatus, speech and best effort data traffic are separated, with one VCC handling one type of traffic and a second VCC utilizing another AAL standard for handling another type of traffic, i.e., different Quality of Service. If there are not ATM cells to transmit from the first
35 VCC, then ATM cells from the second VCC will be transmitted automatically. This is a standard procedure implemented in ATM switches that are available today.

Nevertheless, AAL2 introduces a situation where the leftover bandwidth in one of the VCCs may not be used for any best effort data traffic. This may lead to

ATM cells in one of the VCCs being partially filled resulting in in-efficient bandwidth utilization. Thus, potentially available bandwidth can not be used by any other traffic that passes through the ATM switch.

5 It can be seen that there is a need for a connection admission method and apparatus that uses knowledge-based techniques to decide when and what type of data traffic will be multiplexed with speech traffic in ATM Adaptation Layer 2 (AAL2) environment.

10 It can also be seen that there is a need for a connection admission method and apparatus that supports low bit rate and delay sensitive applications such as mobile telephony in an ATM environment.

It can also be seen that there is a need for a connection admission method and apparatus that maximizes the use of available bandwidth.

SUMMARY OF THE INVENTION

15 To overcome the limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and understanding the present specification, the present invention discloses a knowledge-based connection admission method and apparatus for providing efficient multiplexing of data and speech over AAL2.

20 The present invention solves the above-described problems by using a knowledge-based technique to decide when and what type of data traffic will be multiplexed with speech traffic in ATM Adaptation Layer 2 (AAL2) environment. The knowledge-based connection technique supports low bit rate and delay sensitive applications such as mobile telephony in an ATM environment by maximizing the
25 use of available bandwidth.

A method in accordance with the principles of the present invention includes monitoring ATM cells for a AAL2 connection, determining whether the ATM cells contain unused bytes and multiplexing data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements.

30 Other embodiments of a system in accordance with the principles of the invention may include alternative or optional additional aspects. One such aspect of the present invention is that the multiplexing further includes determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexing the data traffic with the speech traffic when the
35 bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.

Another aspect of the present invention is that the multiplexing further includes determining whether the data traffic requires a bandwidth that exceeds a

bandwidth provided by the unused bytes and preventing the multiplexing of the data traffic with the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes.

Another aspect of the present invention is that the unused bytes represent
5 silence periods during speech traffic.

Another aspect of the present invention is that the multiplexing further includes gathering system observations, processing the system observations with prior knowledge about the system, based upon the processing, determining whether the data traffic is suitable for multiplexing with speech traffic and multiplexing the
10 data and speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic.

Another aspect of the present invention is that the determining further includes determining whether a number of users providing speech traffic are fewer than a predetermine number and unused bytes exist in ATM cells of the speech traffic of
15 the users, calculating the percentage of unused bandwidth of the speech traffic and multiplexing an amount of data traffic with the speech traffic in proportion to the unused bandwidth of the speech traffic.

Another aspect of the present invention is that the multiplexing an amount of data traffic further includes determining whether the unused bandwidth is greater
20 than the bandwidth requested by a data connection and admitting the data connection when the unused bandwidth is greater than the bandwidth requested by the data connection.

Another aspect of the present invention is that the multiplexing an amount of data traffic further includes determining whether the unused bandwidth is greater
25 than the bandwidth requested by a data connection and rejecting the data connection when the unused bandwidth is not greater than the bandwidth requested by the data connection.

Another aspect of the present invention is that the method further including updating the prior knowledge about the system after determining whether the data
30 traffic is suitable for multiplexing with speech traffic.

Another aspect of the present invention is that the updating the prior knowledge further includes asserting the number of speech users when the connection from the speech users is accepted, asserting the delay guarantee of the speech users when a change in the delay guarantee of the speech users occurs,
35 asserting the resource allocated for speech users when there is a change in resource allocation for speech users, and asserting the traffic pattern of the speech users when there is a change in the traffic pattern of speech users.

These and various other advantages and features of novelty which characterize the invention are pointed out with particularity in the claims annexed hereto and form a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its use, reference should be made to the drawings which form a further part hereof, and to accompanying descriptive matter, in which there are illustrated and described specific examples of an apparatus in accordance with the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

Fig. 1 illustrates the Open Systems Interconnection (OSI) physical layer;
Fig. 2 illustrates the AAL2 packet formats;
Fig. 3 illustrates a scenario in which speech and best effort data traffic are separated;
Fig. 4 illustrates the results on actual bandwidth usage in a 2 Mbps link versus the number of users;
Fig. 5 illustrates the simulation result on the amount of unused bytes;
Fig. 6 illustrates how the present invention overcomes the loss of bandwidth due to transmitting partially filled ATM cells;
Fig. 7 illustrates a block diagram of the knowledge-based connection apparatus; and
Fig. 8 illustrates a block diagram of a hardware implementation 800 of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

In the following description of the exemplary embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration the specific embodiment in which the invention may be practiced. It is to be understood that other embodiments may be utilized as structural changes may be made without departing from the scope of the present invention.

The present invention provides a knowledge-based connection admission method and apparatus for providing efficient multiplexing of data and speech over AAL2. The knowledge-based technique according to the present invention decides when and what type of data traffic will be multiplexed with speech traffic in an ATM Adaptation Layer 2 (AAL2) environment. The knowledge-based connection technique supports low bit rate and delay sensitive applications such as mobile telephony in an ATM environment by maximizing the use of available bandwidth.

Fig. 1 illustrates the Open Systems Interconnection (OSI) physical layer 100. Modern networks must handle multiple types of traffic such as video 110, voice 112, data files 114, and interactive data 116. The ATM Adaptation Layer 120 is a collection of standardized protocols that provide services to higher layers by
5 adapting user traffic to a cell format. The AAL 120 is divided into the Convergence Sublayer (CS) and the Segmentation and Reassembly (SAR) sublayer (not shown). The ATM Layer 130 is the second layer of the ATM protocol stack model 100 that constructs and processes the ATM cells. The functions of the ATM layer 130 also include Usage Parameter Control (UPC) and support of Quality of Service (QoS)
10 classes. Finally, the physical layer 140 is the bottom layer of the ATM protocol reference model 100. The physical layer 140 is subdivided into two sublayers, the Transmission Convergence (TC) and the Physical Medium (PM) (also not shown). The physical layer 140 provides the ATM cells transmitted over the physical interfaces that interconnect ATM devices.

15 AAL2 is the new ITU-T specification for supporting low bit rate and delay sensitive applications such as mobile telephony in an ATM environment. AAL2 allows many users to share a single ATM connection by effectively packing variable size packets into ATM cells. AAL2 is subdivided into Service Specific Convergence Specific Layer (SSCS) and Common Parts sub-layer (CPS). The CPS
20 layer approved by ITU-T in September 1997, enables variable size packets (0-64 bytes) from different users to be assembled in an ATM cell payload and transmitted on the same ATM Virtual Channel Connection (VCC). In addition, packets are allowed to straddle across an ATM cell boundary to maximize the bandwidth utilization.

25 Fig. 2 illustrates the AAL2 packet formats 200. In Fig. 2, a CPS-Packet header 201 is 3 bytes long. The CID field 202 is 8 bits long and identifies the Logical Link Control (LLC) for the packet. The Length Indicator (LI) field 203 includes 6 bits and indicates the length of the LLC packet. When the LI field 203 points beyond the end of the current ATM cell, the packet is split between cells. The
30 five bits of the User-To-User Indication Field 204 are identifying user to user information. The Header Error Control (HEC) field 205 includes 5 bits and provides error detection over the packet header.

Also shown in Fig. 2 is a typical Common Parts sublayer packet data unit (CPS-PDU) for AAL2 206. The CPS-PDU Start Field (STF) header 208 includes a
35 six bit Offset Field (OSF) 210, a Sequence Number (SN) 220, and a parity bit 230. The STF 202 is one byte in length and occurs at the beginning of every ATM cell payload. As Fig. 2 shows, the Offset Field (OSF) 210 is 6 bits in length. The OSF 210 indicates the remaining length of the packet that (possibly) started in the

preceding cell from this ATM connection and is continuing in the current cell. Thus, the OSF 210 points to the start of the first new packet and provides immediate recovery of the packet boundary after an event causing loss of packet delineation. The 1-bit sequence number (SN) field 220 provides a modulo-2 sequence numbering of cells. The one parity (P) bit 230 provides odd parity and covers the STF. Then, the payload 240 includes 47 bytes.

Fig. 3 illustrates a scenario 300 in which speech and best effort data traffic are separated. In Fig. 3, The ATM switch 310 provides two VCCs. ATM VCC₁ 320 uses AAL2 for speech traffic 322 and ATM VCC₂ 330 uses the standard AAL5 for carrying best effort data 332 from a single user. The ATM cells 340 of VCC₁ 320 include unused bytes 342. It can be easily concluded from the scenario 300 illustrated in Fig. 3 that if there are not ATM cells to transmit from ATM VCC₁ 320 then ATM cells from ATM VCC₂ 330 will be transmitted automatically. This is a standard procedure implemented in ATM switches that are available today.

However, as mentioned above, AAL2 introduces a situation where the leftover bandwidth, i.e., the unused bytes 342, in ATM VCC₁ 320 could not be used for any best effort data traffic. The main drawback in the scenario 300 illustrated in Fig. 3 is that the ATM cells transmitted via AAL2 VCC₁ 320 are only partially filled resulting in in-efficient bandwidth utilization.

For example, a number of G.729 (CS-ACELP) speech users share a single ATM VCC (AAL2) and their traffic pattern is in such a way that each packet (10 byte) is filled in a ATM cell and transmitted immediately. The number of useful bytes in an ATM cell are 14 and the rest (34) are unused. A calculation of the bandwidth usage ratio reveals that 64% (34/53) of the bandwidth is wasted, since the left-over bandwidth can not be used by any other traffic that passes through the ATM switch.

Extensive simulation on performance issues related to transporting mobile telephony users over AAL2 are reported by Baranitharan Subbiah and Sudhar Dixit in an article entitled "AAL2 For Low Bit Rate Speech and Data: Issues and Challenges", published in IEEE ATM '98 Workshop, May 1998. Fig. 4 illustrates the results 400 on actual bandwidth usage 410 in a 2 Mbps link versus the number of users 420. The results 400 illustrated in Fig. 4 indicate that the allocated bandwidth for speech users is under utilized when there are fewer users.

Also, a simulation result 500 on the amount of unused bytes 510 as shown in Fig. 5 indicate that the number of unused bytes 510 when partial ATM cells are transmitted is much larger when there are fewer than 50 users 530 on the ATM VCC. In addition, Voice Activity Detection (VAD) is a key factor in determining the unused bandwidth. A lower VAD would result in longer silence periods thus

increases the amount of unused bandwidth. The results 500 as illustrated in Fig. 5 were obtained with a ratio of 60% to 40% VAD factor. It can be concluded that leftover (unused) bandwidth by speech users depends on the number of speech users, VAD factor and traffic patterns of speech users at the AAL2 multiplexing entity.

5 In order to improve the overall bandwidth efficiency and to utilize the silence period during speech for best effort data, there is a strong need for an adaptive method and apparatus that monitors various constraints to make an intelligent decision on multiplexing speech and data traffic. At the same time, the method and apparatus should maintain the delay guarantee given to speech users. The present
10 invention maximizes the efficiency of resources allocated for speech users in AAL2 while providing the delay guarantee.

Fig. 6 illustrates a scenario 600 that maximizes bandwidth efficiency according to the present invention. In Fig. 6, an ATM switch 610 how the present invention overcomes the loss of bandwidth due to transmitting partially filled ATM
15 cells. In Fig. 6, the ATM switch 610 provides ATM VCC₁ 320 that uses AAL2 for speech traffic 322 and for carrying best effort data 332. The previously unused bytes of the ATM cells 640 have been filled, or partially filled, with best effort data 650. Thus, the bandwidth allocated for speech users 622 is utilized to its maximum by transmitting best effort data 632 whenever there is leftover bandwidth.

20 Nevertheless, as can be seen from the above analysis, multiplexing data traffic over AAL2 involves a complex decision. The key issues that contribute to this complexity are the number of speech users, the allocated resources, the delay guarantee to speech users, the traffic pattern of active speech users and the traffic pattern of data connection request.

25 The ideal situation for multiplexing data traffic with speech is when there is sufficient amount of leftover bandwidth in the overall allocated bandwidth for speech users. The leftover bandwidth is noticed either when the number of speech users are fewer or traffic distribution at the AAL2 multiplexer is parse (resulting in large number of partial ATM cells). The decision is further complicated due to strict
30 delay requirements of speech users.

The present invention provides a knowledge-based connection method and apparatus that uses the information gathered through self learning for admitting data connection with speech users. This method and apparatus monitors such details as number of users, speech traffic patterns, data connection request and data traffic
35 patterns.

Fig. 7 illustrates a block diagram 700 of the knowledge-based connection apparatus. During the observation phase, 710 the knowledge-based connection apparatus 700 monitors the information related to ATM VCCs allocated for speech

users. The inductive learning 712 is an iterative process by which the knowledge-based connection apparatus 700 updates its prior knowledge 720, i.e., its knowledge of traffic parameters in a AAL2 connection.

Whenever a new data connection request is received, the knowledge-based connection apparatus 700 tries to prove the hypotheses 730 that data traffic is suitable for multiplexing with speech. During the decision process, the knowledge base is used for connection admittance. The knowledge-based induction learning 712 processes observations 710 on the number of active speech users, the traffic pattern of speech users, the traffic pattern of data users and resource availability with prior knowledge 720 such as the number of active speech users, the traffic pattern of speech users at the AAL2 multiplex entity, the traffic pattern of data users (data rate/best effort/ABR etc), the resources allocated for speech users (BW, QoS etc), and the delay requirement of speech users to attempt prove the hypotheses 730 that data traffic is suitable for multiplexing with speech and to make a prediction 740 that is used to admit or reject a data cell.

The knowledge-based induction learning 712 uses decision rules as explained herein. However, those skilled in the art will recognize that the decision rules described herein are not meant to limit the invention, but are presented for illustration only. Other decision rules in accordance with the teaching of the present invention are possible.

The first decision rule is if the number of users are fewer than a predetermined number, e.g., 50, and their traffic pattern results in partial ATM cells. then calculate the percentage of unused bandwidth and assert the leftover bandwidth. The second decision rule is if the unused bandwidth is greater than the bandwidth requested by a data connection, then admit the call through AAL2. The third decision rule is if the second decision rule fails, then reject the data connection through AAL2 and admit through AAL5.

Knowledge update rules are also implemented. Likewise, those skilled in the art will recognize that the knowledge rules described herein are not meant to limit the invention, but are presented for illustration only. Other knowledge rules in accordance with the teaching of the present invention are possible. The first knowledge rule is that if the connection from the speech users is accepted, then the number of speech users is asserted. The second knowledge rule is that if there is a change in the delay guarantee of the speech users, the delay guarantee of the speech users is asserted. The third knowledge rule is if there is a change in resource allocation for speech users, assert the resource allocated for speech users. The fourth knowledge rule is that if there is a change in the traffic pattern of speech users, the traffic pattern of the speech users is asserted.

One of the limitations in multiplexing any arbitrary data traffic request with speech is keeping the delay requirement to speech users at an acceptable level. The knowledge-based connection method and apparatus solves this problem by monitoring the leftover bandwidth by speech users and bandwidth request of a new data connection. A new data connection is admitted only if it meets a set of requirements that stipulates data traffic for multiplexing with speech traffic. If the bandwidth request of the new data connection exceeds the leftover bandwidth or it requires strict delay guarantees then the connection request is either denied or accepted through AAL5. The knowledge-based connection method and apparatus is not a replacement for standard CAC method and apparatus implemented in current ATM switches. The knowledge-based connection method and apparatus is used mainly for AAL2 type connections in conjunction with the standard CAC method and apparatus.

Multiplexing data traffic along with speech has advantages such as efficient use of silence period during speech and less complexity involved in setting up individual ATM (AAL5) VCC for data users. Multiplexing data with speech is efficient when there are fewer speech users and a traffic pattern that result in large number of partially transmitted ATM cells. The key advantage of using knowledge-based techniques in CAC method and apparatus is that the decision making process is highly adaptive to the ever-changing network traffic. An method and apparatus that is used for decision making should include all possible scenarios that could happen in a network and at the same time able to adopt itself to the changing network characteristics. Since the decision process in AAL2 multiplexing is more complex than statistical multiplexing, the intelligent method and apparatus approach based on self learning is needed.

Fig. 8 illustrates a block diagram of a hardware implementation 800 of the present invention. A switch according to the present invention, such as illustrated in Fig. 6, include a processor 810 and memory 812 which may include random access memory (RAM), read-only memory (ROM), or any other memory configuration. The processor 810 operates under the control of an operating system (not shown) and is configured to executes one or more computer programs implementing the knowledge-based connection method and apparatus, which are represented in Fig. 8 by the "box" 830 within the block indicating the processor 810. Generally, the computer programs 830 may be tangibly embodied in a computer-readable medium or carrier 840. The computer programs 830 may be loaded from the computer-readable medium or carrier 840 into memory 812 for execution by the processor 810 as discussed above with reference to Figs. 6 and 7. The computer program 830 comprises instructions which, when read and executed by the processor 810, causes

the processor 810 to perform the steps necessary to execute the steps or elements of the present invention. Although an exemplary computer system configuration is illustrated in Fig. 8, those skilled in the art will recognize that any number of different configurations performing similar functions may be used in accordance
5 with the present invention.

In summary, the present invention handles connection admission procedures for data calls in an AAL2 environment. The present invention uses the knowledge-based techniques to decide what type of data connection will be admitted and under what conditions. Mobile applications such as SMS, WWW and email, which have
10 been identified as best effort data services in a wireless environment, require very low data rates especially in a wireless environment. This makes these types of applications a good choice for multiplexing with speech during silence periods. The present invention enables the bandwidth allocated for speech traffic in a ATM VCC be used to its maximum capacity by admitting data calls that are strictly within the
15 left-over bandwidth by speech users. Accordingly, the present invention uses self-learning methods to update its local knowledge such as the number of speech users, speech traffic distribution (resulting in partial ATM cells), delay requirement of speech users and traffic characteristics of the new data connection. Whenever a request for data connection is received, the knowledge-based connection method and
20 apparatus uses the knowledge it gathered so far to make a decision on whether to accept or reject the request. While improving the bandwidth efficiency by effectively using the left-over bandwidth by speech users, this method and apparatus does not compromise the delay requirement of speech users at any time. In addition, the bandwidth leftover due to silence in speech is utilized for best-effort data thus
25 achieving maximum bandwidth efficiency.

The foregoing description of the exemplary embodiment of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is
30 intended that the scope of the invention be limited not with this detailed description, but rather by the claims appended hereto.

WHAT IS CLAIMED IS:

1. A method for multiplexing data with speech so that the bandwidth of AAL2 connections are maximized, comprising:
 - 5 monitoring ATM cells for a AAL2 connection;
 - determining whether the ATM cells contain unused bytes;
 - multiplexing data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements.
2. The method of claim 1 wherein the multiplexing further comprises
 - 10 determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexing the data traffic with the speech traffic when the bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.
3. The method of claim 1 wherein the multiplexing further comprises
 - 15 determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and preventing the multiplexing of the data traffic with the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes.
4. The method of claim 1 wherein the unused bytes represent silence
 - 20 periods during speech traffic.
5. The method of claim 1 wherein the multiplexing further comprises:
 - gathering system observations;
 - processing the system observations with prior knowledge about the system;
 - based upon the processing, determining whether the data traffic is suitable
 - 25 for multiplexing with speech traffic; and
 - multiplexing the data and speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic.
6. The method of claim 5 wherein the determining further comprises:
 - determining whether a number of users providing speech traffic are fewer
 - 30 than a predetermine number and unused bytes exist in ATM cells of the speech traffic of the users;
 - calculating the percentage of unused bandwidth of the speech traffic; and

multiplexing an amount of data traffic with the speech traffic in proportion to the unused bandwidth of the speech traffic.

7. The method of claim 6 wherein the multiplexing an amount of data traffic further comprises:
- 5 determining whether the unused bandwidth is greater than the bandwidth requested by a data connection; and
- admitting the data connection when the unused bandwidth is greater than the bandwidth requested by the data connection.

8. The method of claim 6 wherein the multiplexing an amount of data traffic further comprises:
- 10 determining whether the unused bandwidth is greater than the bandwidth requested by a data connection; and
- rejecting the data connection when the unused bandwidth is not greater than the bandwidth requested by the data connection.

9. The method of claim 5 further comprising updating the prior knowledge about the system after determining whether the data traffic is suitable for multiplexing with speech traffic.
- 15

10. The method of claim 9 wherein the updating the prior knowledge further comprises:
- 20 asserting the number of speech users when the connection from the speech users is accepted;
- asserting the delay guarantee of the speech users when a change in the delay guarantee of the speech users occurs;
- asserting the resource allocated for speech users when there is a change in resource allocation for speech users; and
- 25 asserting the traffic pattern of the speech users when there is a change in the traffic pattern of speech users.

11. A method for multiplexing data with speech so that the bandwidth of AAL2 connections are maximized, comprising:
- 30 monitoring ATM cells for a AAL2 connection;
- determining whether the monitored ATM cells contain unused bytes;
- gathering system observations;
- processing the system observations with prior knowledge about the system;

based upon the processing the system observations with prior knowledge about the system and determining whether the ATM cells contain unused bytes, determining whether the data traffic is suitable for multiplexing with speech traffic; and

- 5 multiplexing the data and speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic.

12. The method of claim 11 wherein the determining further comprises:
determining whether a number of users providing speech traffic are fewer
than a predetermine number and unused bytes exist in ATM cells of the speech
10 traffic of the users;
calculating the percentage of unused bandwidth of the speech traffic; and
multiplexing an amount of data traffic with the speech traffic in proportion to
the unused bandwidth of the speech traffic.

13. The method of claim 12 wherein the multiplexing an amount of data
15 traffic further comprises:
determining whether the unused bandwidth is greater than the bandwidth
requested by a data connection; and
admitting the data connection when the unused bandwidth is greater than the
bandwidth requested by the data connection.

14. The method of claim 12 wherein the multiplexing an amount of data
20 traffic further comprises:
determining whether the unused bandwidth is greater than the bandwidth
requested by a data connection; and
rejecting the data connection when the unused bandwidth is not greater than
25 the bandwidth requested by the data connection.

15. The method of claim 11 further comprising updating the prior
knowledge about the system after determining whether the data traffic is suitable for
multiplexing with speech traffic.

16. The method of claim 15 wherein the updating the prior knowledge
30 further comprises:
asserting the number of speech users when the connection from the speech
users is accepted;

asserting the delay guarantee of the speech users when a change in the delay guarantee of the speech users occurs;

asserting the resource allocated for speech users when there is a change in resource allocation for speech users; and

5 asserting the traffic pattern of the speech users when there is a change in the traffic pattern of speech users.

17. The method of claim 11 wherein the multiplexing further comprises determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexing the data traffic with the speech traffic
10 when the bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.

18. The method of claim 11 wherein the multiplexing further comprises determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and preventing the multiplexing of the data traffic with
15 the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes.

19. The method of claim 11 wherein the unused bytes represent silence periods during speech traffic.

20. An article of manufacture for a processor-based AAL2 switch, the
20 article of manufacture comprising a computer readable medium having instructions for causing a processor to perform a knowledge-based connection method comprising:

monitoring ATM cells for a AAL2 connection;

determining whether the ATM cells contain unused bytes;

25 multiplexing data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements.

21. The article of manufacture of claim 20 wherein the multiplexing further comprises determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexing the data traffic
30 with the speech traffic when the bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.

22. The article of manufacture of claim 20 wherein the multiplexing further comprises determining whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and preventing the multiplexing of the data traffic with the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes.

23. The article of manufacture of claim 20 wherein the unused bytes represent silence periods during speech traffic.

24. The article of manufacture of claim 20 wherein the multiplexing further comprises:
gathering system observations;
processing the system observations with prior knowledge about the system;
based upon the processing, determining whether the data traffic is suitable for multiplexing with speech traffic; and
multiplexing the data and speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic.

25. The article of manufacture of claim 24 wherein the determining further comprises:
determining whether a number of users providing speech traffic are fewer than a predetermine number and unused bytes exist in ATM cells of the speech traffic of the users;
calculating the percentage of unused bandwidth of the speech traffic; and
multiplexing an amount of data traffic with the speech traffic in proportion to the unused bandwidth of the speech traffic.

26. The article of manufacture of claim 25 wherein the multiplexing an amount of data traffic further comprises:
determining whether the unused bandwidth is greater than the bandwidth requested by a data connection; and
admitting the data connection when the unused bandwidth is greater than the bandwidth requested by the data connection.

27. The article of manufacture of claim 25 wherein the multiplexing an amount of data traffic further comprises:
determining whether the unused bandwidth is greater than the bandwidth requested by a data connection; and

rejecting the data connection when the unused bandwidth is not greater than the bandwidth requested by the data connection.

28. The article of manufacture of claim 24 further comprising updating the prior knowledge about the system after determining whether the data traffic is suitable for multiplexing with speech traffic.

29. The article of manufacture of claim 28 wherein the updating the prior knowledge further comprises:

asserting the number of speech users when the connection from the speech users is accepted;

10 asserting the delay guarantee of the speech users when a change in the delay guarantee of the speech users occurs;

asserting the resource allocated for speech users when there is a change in resource allocation for speech users; and

15 asserting the traffic pattern of the speech users when there is a change in the traffic pattern of speech users.

30. An AAL2 switch for multiplexing data traffic and speech traffic together through an AAL2 connection, , comprising:

a memory, coupled to the AAL2 management entity, for storing observation knowledge and prior knowledge; and

20 an AAL2 management entity for processing the observation knowledge and the prior knowledge, wherein the AAL2 management entity monitors ATM cells of a AAL2 connection, determines whether the ATM cells contain unused bytes, and multiplexes data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements.

25 31. The AAL2 switch of claim 30 wherein the management entity determines whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexes the data traffic with the speech traffic when the bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.

30 32. The AAL2 switch of claim 30 wherein the management entity determines whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and prevents the multiplexing of the data traffic with

the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes.

33. The AAL2 switch of claim 30 wherein the unused bytes represent silence periods during speech traffic.

5 34. The AAL2 switch of claim 30 wherein the management entity gathers system observations and updates prior knowledge for storage in the memory, the management entity processing the system observations with prior knowledge about the system, determines whether the data traffic is suitable for multiplexing with speech traffic based upon the processing, and multiplexes the data and speech traffic
10 when the data traffic is determined to be suitable for multiplexing with speech traffic.

35. A knowledge-based connection entity, comprising:
observation knowledge stored in memory;
prior knowledge stored in memory; and
15 a processor for deciding when data traffic can be multiplexed with speech traffic based upon the observation knowledge and prior knowledge.

36. The knowledge-based connection entity of claim 35 wherein the processor processes the observation knowledge and the prior knowledge to determine whether the data traffic requires a bandwidth that exceeds a bandwidth
20 provided by unused bytes in ATM cells carrying the speech traffic and multiplexes the data traffic with the speech traffic when the bandwidth required by the data traffic does not exceeds the bandwidth provided by the unused bytes.

FIG. 1

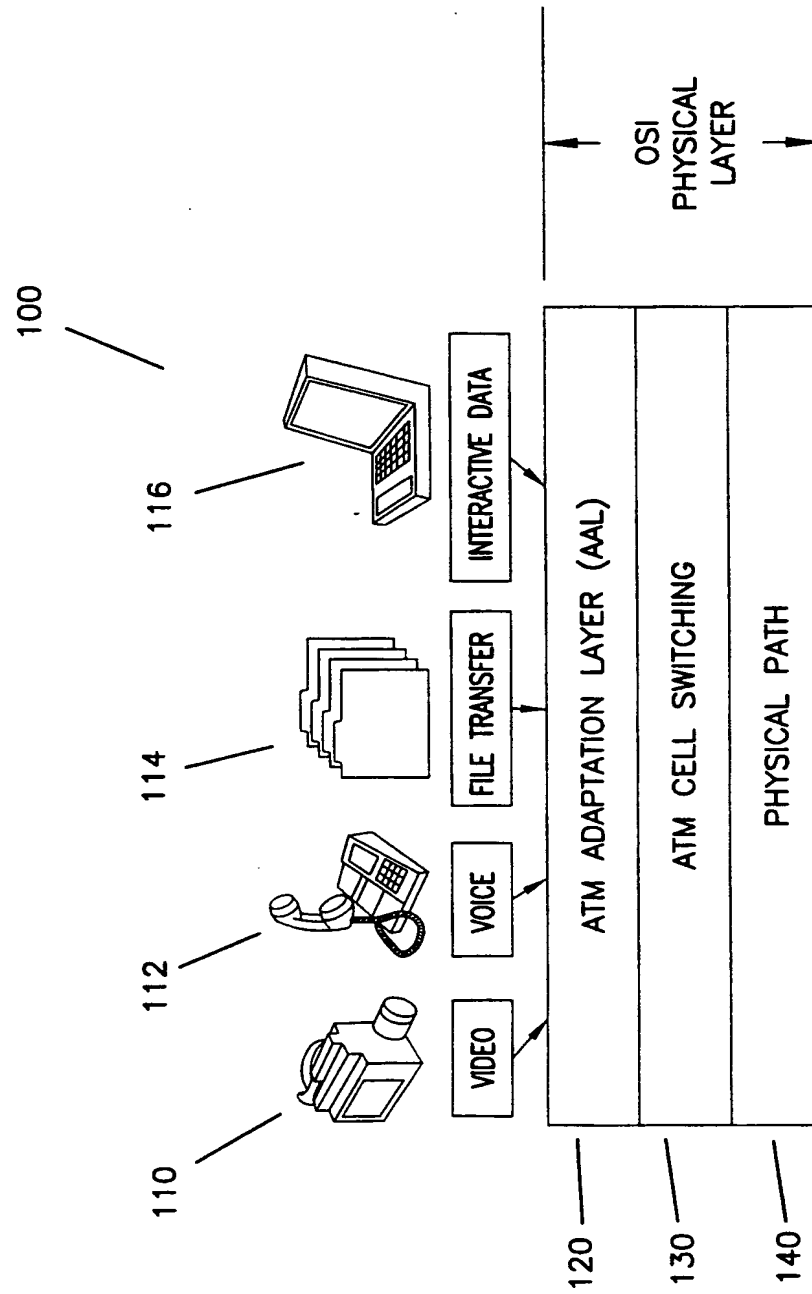


FIG. 2

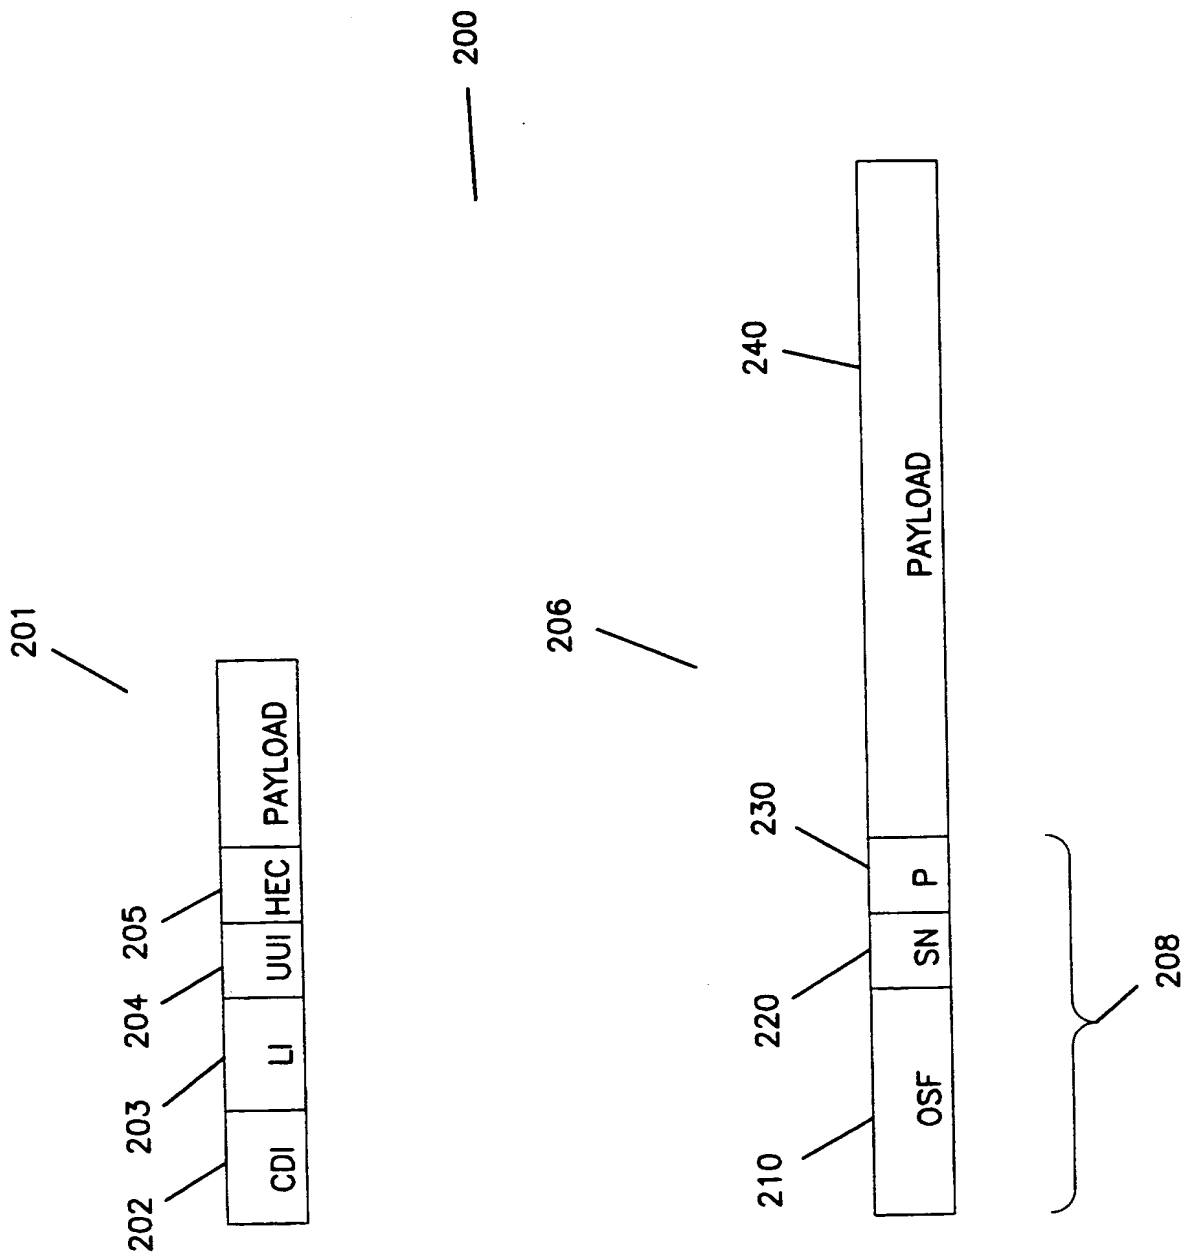


FIG. 3


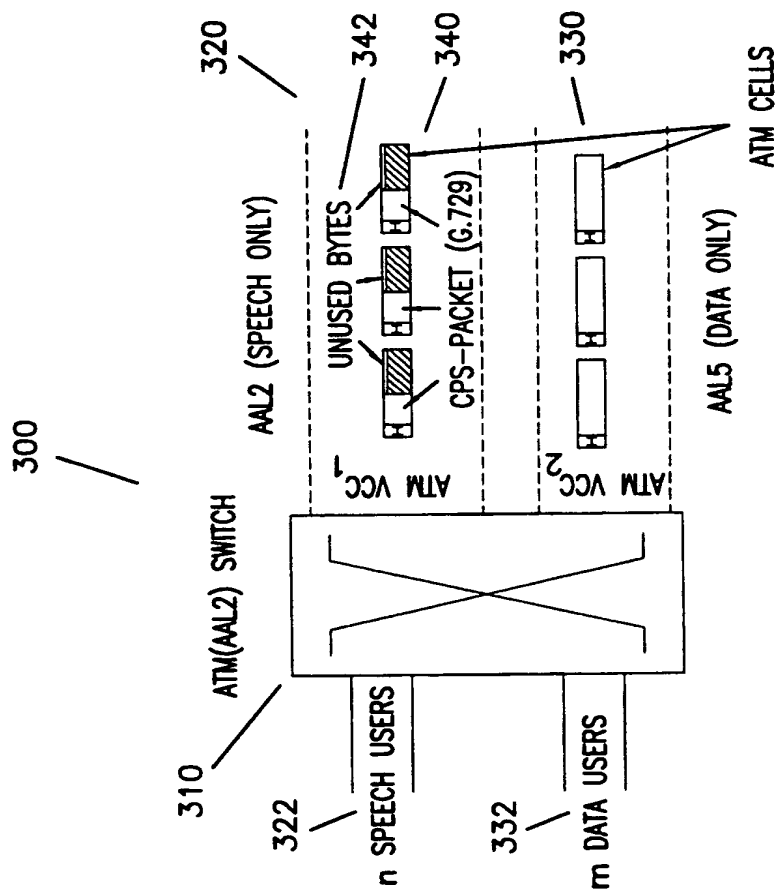


FIG. 6

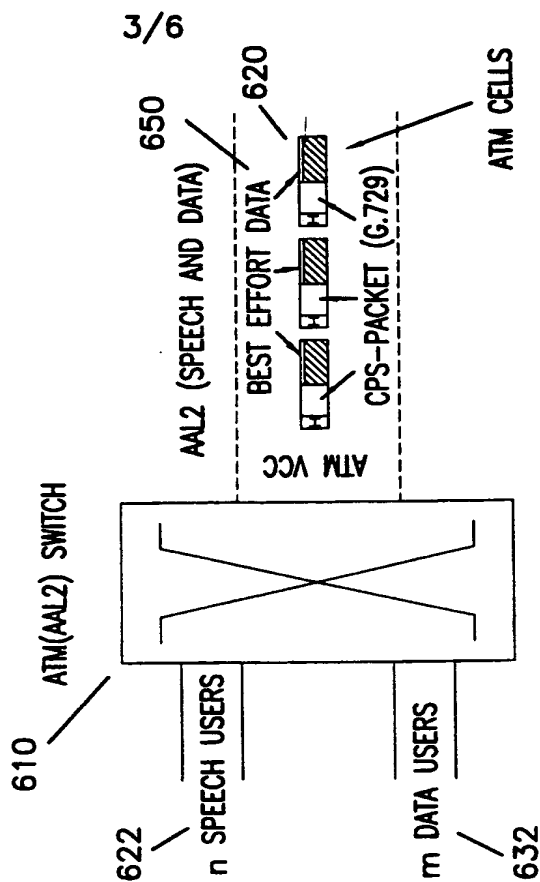

4/6

FIG. 5


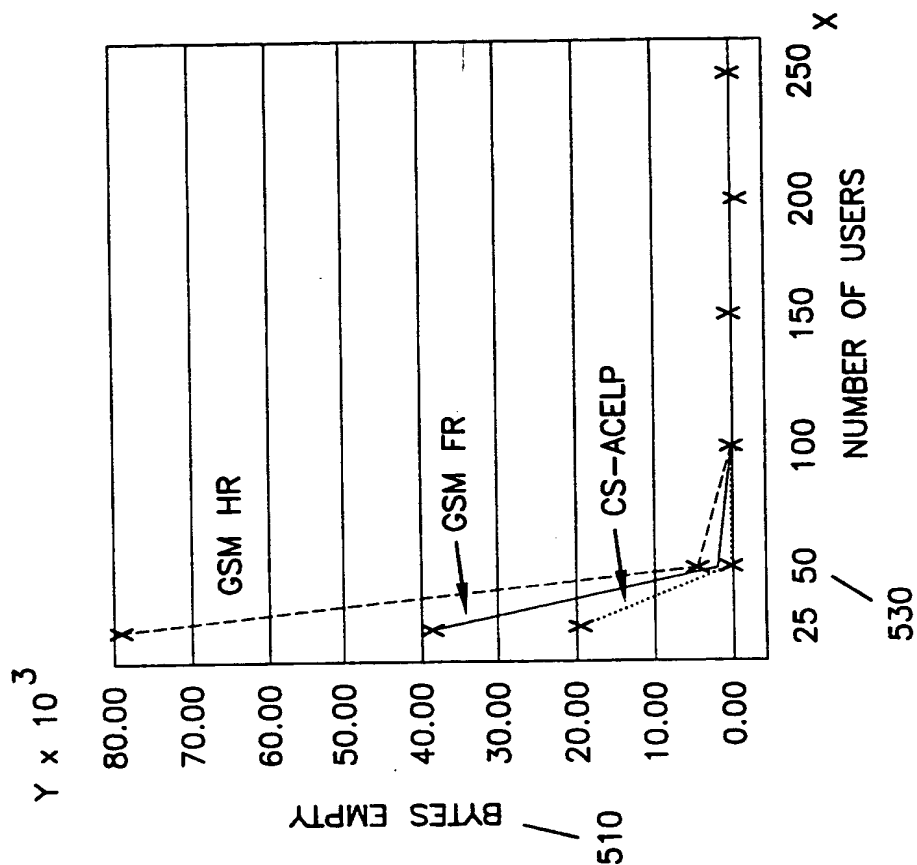


FIG. 4

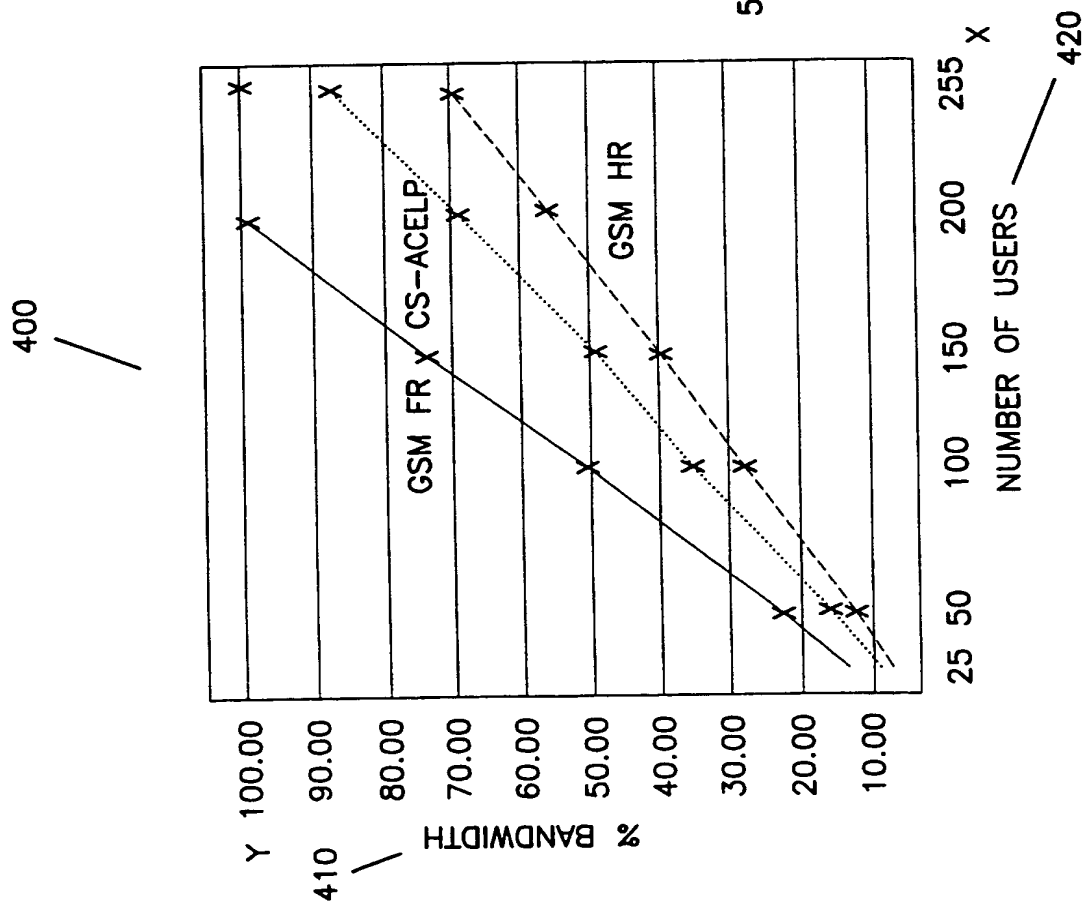

5/6

FIG. 7


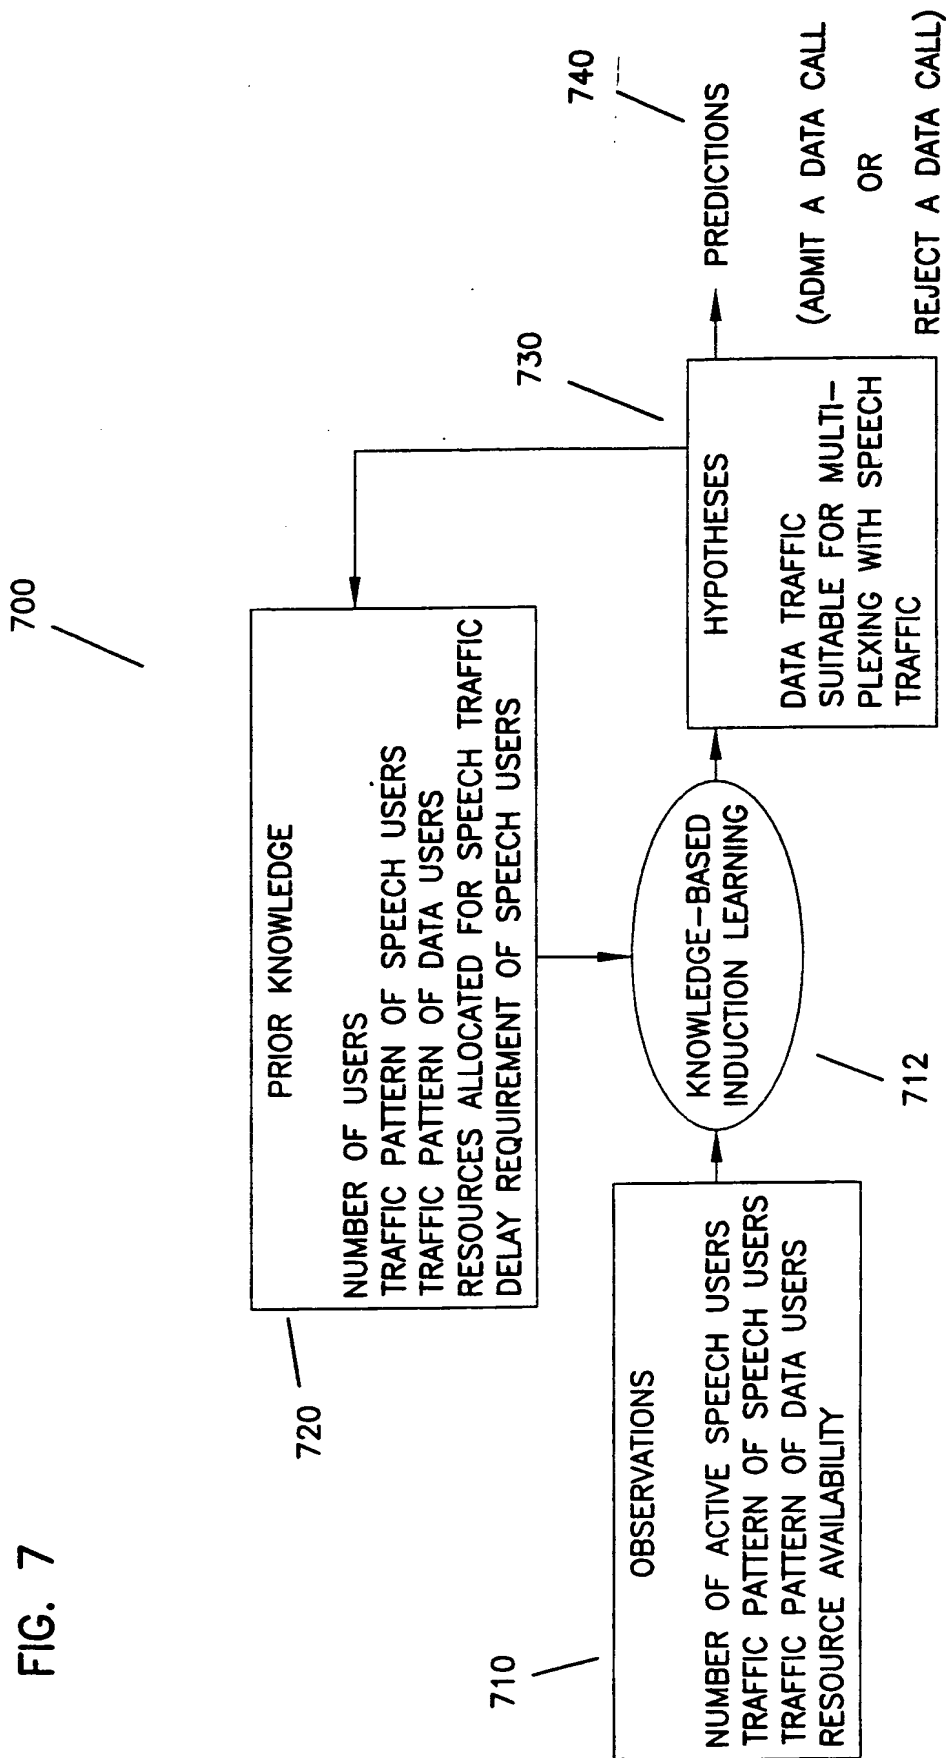


FIG. 8



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

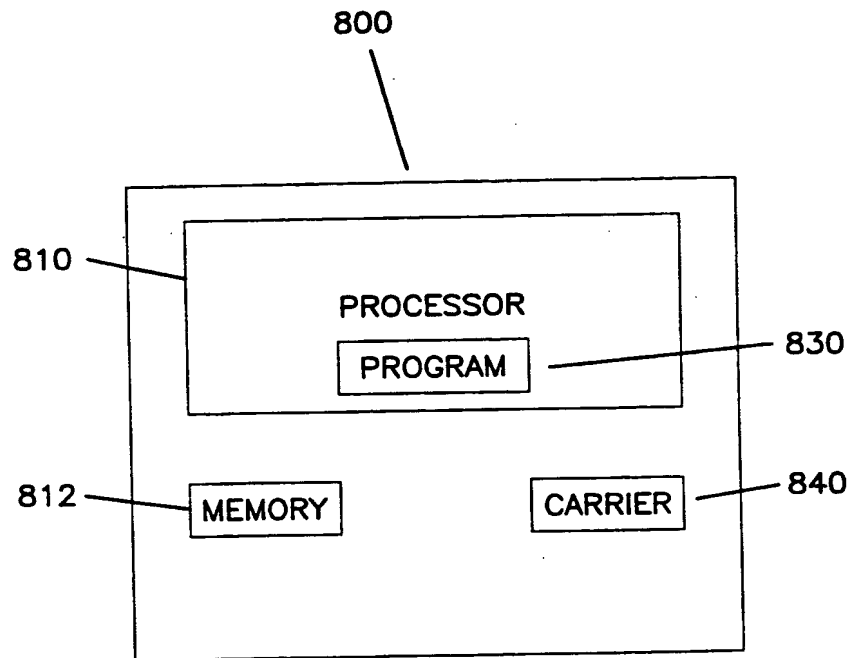

(43) International Publication Date
10 February 2000 (10.02.2000)

PCT

(10) International Publication Number
WO 00/07406 A3

(51) International Patent Classification⁷: **H04Q 11/04**

(21) International Application Number: PCT/US99/15277

(22) International Filing Date: 7 July 1999 (07.07.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/126.835 30 July 1998 (30.07.1998) US

(71) Applicant: **NOKIA NETWORKS OY** (FI/FI); Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor: **SUBBIAH, Baranitharan**; 1665 Belleville Way Apt J, Sunnyvale, CA 94087 (US).

(74) Agent: **LYNCH, David, W.**; Altera Law Group, LLC, 10749 Bren Road East, Opus 2, Minneapolis, MN 55343 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN,

CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
16 August 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: KNOWLEDGE-BASED CONNECTION ADMISSION METHOD AND APPARATUS FOR PROVIDING EFFICIENT MULTIPLEXING OF DATA AND SPEECH OVER AAL2

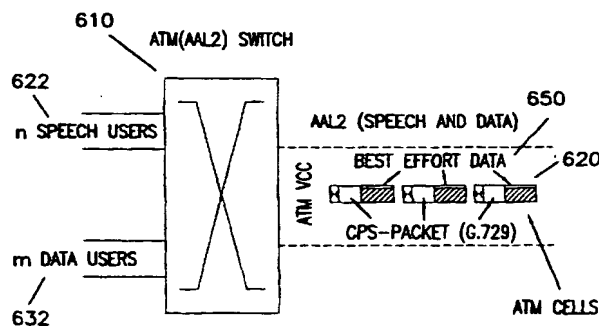

(57) Abstract: A knowledge-based connection admission method is disclosed for efficient multiplexing of data and speech over AAL2. The method uses a knowledge-based technique to decide when and what type of data traffic will be multiplexed with speech traffic in ATM Adaptation Layer 2 (AAL2) environment. The knowledge-based connection technique supports low bit rate and delay sensitive applications such as mobile telephony in an ATM environment by maximizing the use of available bandwidth. The method includes monitoring ATM cells for an AAL2 connection, determining whether the ATM cells contain unused bytes and multiplexing data traffic with speech traffic on the AAL2 connection when the data meets a predetermined set of requirements. The method determines whether the data traffic requires a bandwidth that exceeds a bandwidth provided by the unused bytes and multiplexes the data traffic with the speech traffic when the bandwidth required by the data traffic does not exceed the bandwidth provided by the unused bytes and prevents the multiplexing of the data traffic with the speech traffic when the bandwidth required by the data traffic exceeds the bandwidth provided by the unused bytes. The unused bytes represent silence periods during speech traffic. System observations are gathered and processed with prior knowledge about the system. Based upon the processing, whether the data traffic is suitable for multiplexing with speech traffic is determined and the data is multiplexed with the speech traffic when the data traffic is determined to be suitable for multiplexing with speech traffic in the unused bytes of the speech ATM cells.

WO 00/07406 A3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/15277

A. CLASSIFICATION - SUBJECT MATTER
IPC 7 H04Q11/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HOELLER J: "VOICE AND TELEPHONY NETWORKING OVER ATM" ERICSSON REVIEW, no. 1, 1 January 1998 (1998-01-01), pages 40-45, XP000734508 ISSN: 0014-0171	1,4,20
Y	* box C * page 43; figures 3,C1	5,11,30
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

15 October 1999

Date of mailing of the international search report

25/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gregori, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/15277

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2299240 A	25-09-1996	EP 0815702 A	07-01-1998
		WO 9631080 A	03-10-1996
		JP 11502683 T	02-03-1999
		US 5943339 A	24-08-1999

Form PCT/SA/210 (patent family annex) (July 1992)

